

INSPECTION TROLLEYS

These are trolleys made of light aluminium alloy dedicated to the inspection of 2 bundled, 3 bundled and 4 bundled conductors, with non-standard spacing between conductors, for 2 persons working standing.

The trolleys are equipped with spacers and insulators crossing system, parking brake, metric meter device.

Special models with different characteristics are available on demand.

CRB060




CRT160



CRQ140



CRB060

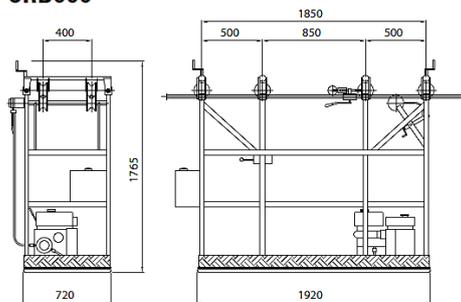

Mod. CRB061

Light alloy / 2 bundled conductors

Spacing	400 mm
Capacity	250 kg
Weight	80 kg

Mod. CRB060


2 bundled conductors / Motorized

Weight	110 kg
--------	--------

Engine

Petrol engine	3 kW
Cooling	Air
Starter	Recoil starter

CRT160

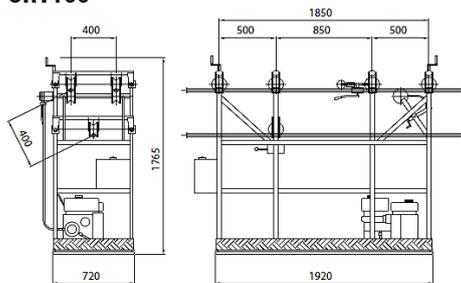

Mod. CRT161

Light alloy / 3 bundled conductors

Spacing	400 mm
Capacity	250 kg
Weight	84 kg

Mod. CRT160


3 bundled conductors / Motorized

Weight	120 kg
--------	--------

Engine

Petrol engine	3 kW
Cooling	Air
Starter	Recoil starter

CRQ140

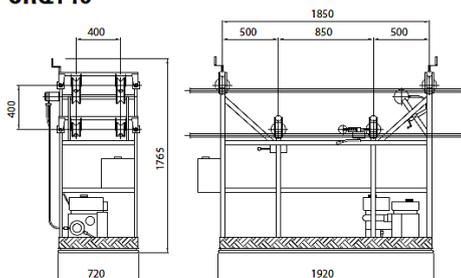

Mod. CRQ141

Light alloy / 4 bundled conductors

Spacing	400 mm
Capacity	250 kg
Weight	95 kg

Mod. CRQ140

4 bundled conductors / Motorized

Weight	125 kg
--------	--------

Engine

Petrol engine	3 kW
Cooling	Air
Starter	Recoil starter